

Louvre Shutters Locks, Bolts & Brackets

Security Bolt.

Available Installation Methods
Hinged In Frame
Hinged No Frame

Important Note:

The security bolt is stainless steel and is placed at the top or bottom of the selected panels(s) stile on the opposite side of the hinges



Totally Outdoors Weatherwell Louvre Shutters have a range of security and privacy locks and bolts for your doors & window shutters

Double Shoot Bolt

Available Installation Methods
Hinged in Frame - A9300

Important Note

Available with a key lock only. Note: All openings will be keyed alike as standard for each other

Double Shoot Bolt default position is centre unless specified in notes



Secure Your Verandah

Blade Stay


Available Colours:
Black & White - A9000

Important Note:

A blade lock is required every 1300mm or where a split rotation is required.

Max panel height is 1800mm and will require 2x blade locks. If a panel has a mid-rail, a Blade Lock will be required both above and below the mid-rail to operate each section independently.

Positioning: If uneven number of blades, it will default to one blade belowcentre of section of blades

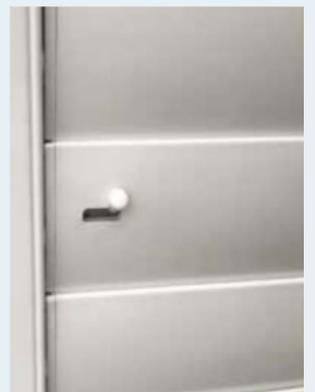

Lockable Handles

Black - A9202
White - A9201

Important Note:

This handle can be deadlocked



Lockable Handles

Please note this is not a security handle and can not be Dead Locked

Silver - A9200

Important Note:

When a handle is ordered with an 89 or 114mm blade its default position will be adjacent to the mid rail so the handle will clear the Blade position



Flush Bolts

Available Installation Methods:

Hinged in Frame
Hinged No Frame
Multi-Fold (bottom only)

Available Colours:
White, Silver & Black

Important Note:

Flush bolts can not be fitted to the section of the panels the hardware is attached to the tracking system.



Making Project Come Alive

Display Centre - 52 Star Crescent Hallam Vic, 3803

Telephone 9704 4900

email: sales@totallyoutdoors.com.au

www.totallyoutdoors.com.au

